

Datasheet 1/3

Extendr® 4

High performance multiband cellular and WiFi antenna with extended range

Rugged tamper-proof multiband antenna combining all major cellular bands and all WiFi bands. The antenna is ideal for fleet management, IoT and M2M applications providing a stable connection in critical areas. The Extendr® antenna family offers multiple mounting options. The antenna is offered with customer specified cables and connectors.

- 9 cellular bands and all WiFi bands in one installation
- IP67 water proof design for professional use
- Low profile design
- Ground plane independent

Electrical Specifications:	
Frequency	790 - 2690 MHz, 2400 - 2495 MHz, 4910 - 5925 MHz (LTE800/1800/2600, GSM850/900/1800, PCS/DECT1900, UMTS900/2100, IEEE 802.11 (WLAN) a/b/g/h/j/n/p/ac)
Impedance	50 Ohm
VSWR	<3.0:1 (790-960 MHz),<3.0:1 (1710-2170 MHz), <1.5:1 (2500-2690 MHz) , <1.5:1 (2400-2490 MHz), < 2.5:1 (4910-5925 MHz)
Polarisation	LTE/GSM/UMTS/WLAN: Linear
GAIN	0 dBd, 2.1 dBi (2400-2490 MHz) 1 dBd, 3.1 dBi (790-960 MHz, 1710-2170 MHz) 3 dBd, 5.1 dBi (2500-2690 MHz, 4910-5925 MHz
Max. Input Power	10 W
Antistatic Protection	Direct Ground (DC-short)
Protection	

Mechanical Specifications:		
Color	Black	
Height	46 mm (Above surface when mounted)	
Weight	160 g	
Diameter	Ø 111 mm	
Mounting place	On vertical or horizontal surfaces (conductive or non-conductive). E.g. car roofs, metering cabinets and brackets	
Mounting hole	Ø 16 - 17 mm	
Materials	ABS, silicon, brass, PVC, PE and PCB	

reserves the right to introduce changes to this information without notice.















Datasheet 2/3

-		
Operating temperature	-40°C to +85°C	
Connector	LTE/GSM/UMTS (Red): SMA-male (Other types available)	
Connector 2	WLAN (Black): SMA-male (Other types available)	
Cable	RG174/U, 1.5 m (Other cable lengths available)	
Ingress Protection	IP67	
Ordering information:		
P/N	48014-000 (1.5 m cable + SMA-male - Bulk packing) - Through Hole Mounting	
P/N	48014-001 (1.5 m cable + SMA-male - In polybag) - Through Hole Mounting	
P/N	48024-000 (1.5 m cable + SMA-male - Bulk packing) - Adhesive Mounting	
P/N	48024-001 (1.5 m cable + SMA-male - In polybag) - Adhesive Mounting	
P/N	48034-000 (1.5 m cable + SMA-male - Bulk packing) - Magnetic Mounting	
P/N	48034-001 (1.5 m cable + SMA-male - In polybag) - Magnetic Mounting	
Packaging Information:		
Туре	Bulk paking or individually packing in Polybag (See "ORDERING INFORMATION")	









Datasheet 3/3


48012-000 - Through Hole Mounting - Outline Drawing

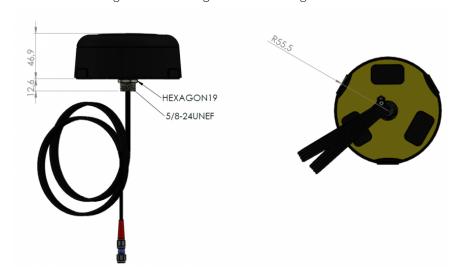

48022-000 - Adhesive Mounting - Outline Drawing

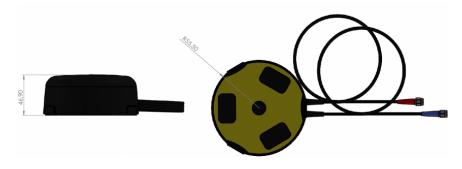

48032-000 - Magnetic Mounting - Outline Drawing

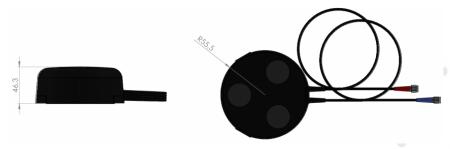

reserves the right to introduce changes to this information without notice.