VHF-light

30931LW-AC Marine and Land Based VHF Antenna. Tx/Rx. 100W Light-Weight. 0 dBd. UHF female. Packed in plastic

This is an omnidirectional antenna for marine and land based solutions. Suitable for rail and mast mounting via the 1" 14TPI base. The antenna is manufactured in premium quality materials in order to prevent galvanic corrosion. Radiating elements are made of copper. The antenna is manufactuted using crimping technology giving the antenna a 4-5 times stronger build-up. The antenna has the same rugged design as all other AC Antennas products thus it withstand harsh environmental conditions, both on sea and land.

Short description	
Product group	VHF
Design	Whip in fibreglass
Pattern	Omnidirectional

Electrical specifications

Frequency range [MHz]	A: 156.0-162.5 / B: 88-108 / C: 160-250
Bandwidth [MHz]	6.5 / 20 / 90
Nominal Impedance [Ohm]	50
Max. Input Power [Watt]	A: 100 B+C: Receive only
Gain [dBd/dBi/Marine dB]	0/2.15/3
VSWR	A: <2.0:1 B+C: Rx only
Polarisation	Vertical
DC Shorted	No
DC Grounded	Yes
Connector	UHF-Female


Mechanical specifications

Length [m/ft]	1.14 / 3.70
Sections	1
Weight [kg/lbs]	0.30 / 0.70
Survival Wind Speed [km/h / m/s / mph]	160 / 45 / 99
Wind Area [m2/ft2]	0.0165 / 0.1776
Wind Load @ 160km/h [N]	24
Material	Fibreglass
Colour	White
Operating Temperature Range [°C/°F]	-40 to +60 / -40 to +140
Ingress Protection	IP66
Thread	1" 14TPI male / -
Mounting	



Midtkom ApS · Ølandsvej 4 · DK-8800 Viborg · Denmark · Tel: +45 40500900 info@midtkom.dk· www.midtkom.dk



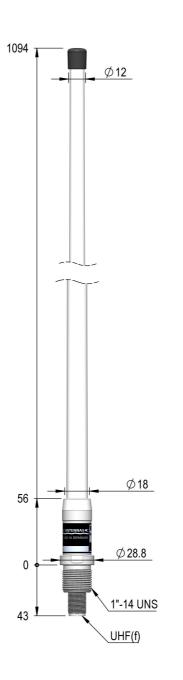

Midtkom ApS · Ølandsvej 4 · DK-8800 Viborg · Denmark · Tel: +45 40500900 info@midtkom.dk· www.midtkom.dk

Specifications subject to change without further notice. The information in this document does not form part of any quotation or contract.

Nov 21, 2023 - Page 2