

HF8000 TX/RX

8 m three-part LF/HF Fibreglass Antenna



- High quality 8 m high HF antenna for professional use
- Designed for GMDSS installations
- Rugged design
- Chrome plated solid brass joints
- Designed for rail mounting
- Side fed via open single wire
- Full omni-directional radiation pattern

Electrical Specifications:

| | |
|-----------------------|--------------------------|
| Frequency | 1.4 - 30 MHz (MF and HF) |
| Polarisation | Vertical |
| Max. Power | 1200 W PEP |
| Static Capacitance | 100 pF |
| Insulation Resistance | 10 GOhm |
| Electric Length | 6790 mm |

Mechanical Specifications:

| | |
|-----------------------|---|
| Color | White |
| Height | 8 m |
| Diameter | Ø 40 to Ø 5 mm |
| Mounting | Rail Bracket Kit (Large) P/N 10000-163 (Not supplied!) |
| Materials | PU-painted heavy duty glass-fibre tubes and chromed solid brass |
| Operating temperature | -40C to +60C |
| Connector 1 | Screw terminal |
| Cable | No cable supplied (Use open single wire) |
| Mounting place | On rail or pole (Ø 30 - 90 mm) |
| Mounting Instruction | Supplied |
| Serial no. | On product label |

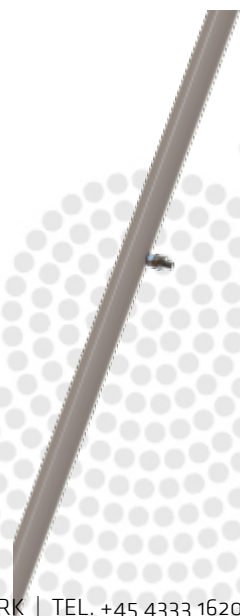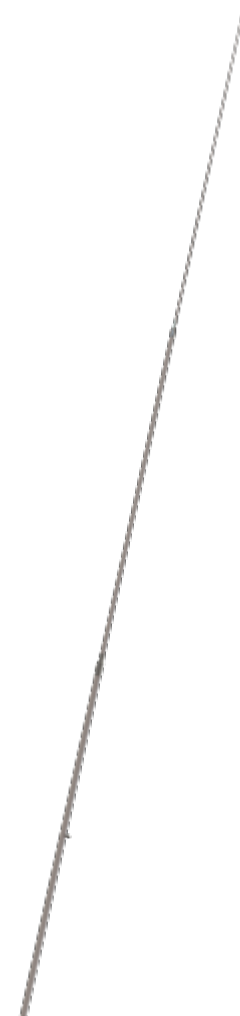

Ordering information:

| | |
|-----|------------------------------|
| P/N | 13800-002 (Without brackets) |
|-----|------------------------------|

Packing information:

| | |
|---------|-------------|
| Packing | Carton tube |
|---------|-------------|


| | |
|------|----------------|
| Size | Ø 86 x 2900 mm |
|------|----------------|



Outline Drawing



Mounting

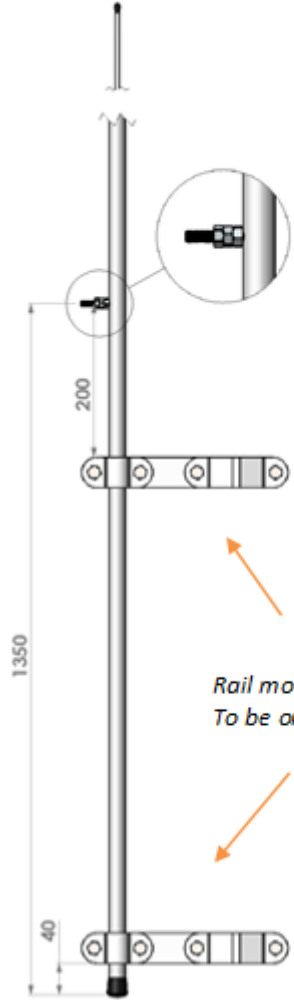

*Rail mounts not included.
To be ordered separately.*

