

# danita 27MHz F mobile antenna

## CB antenna 93 cm. 5/8λ



Pre-tuned to 27.2 MHz, but can be fine tuned in top of the antenna. Remove the top cover.

The cable is angled 90° from base for easy and professional look, under the vehicle roof.  
Can be mounted from both inside and outer side.  
FME/UHF adaptor included, so no soldering is needed.

### Specifications

#### Electrical data:

CB band: (26.965-27.405 MHz)

Antenna type: 5/8λ

Whip material: Glass fiber

Band with: >500KHz

Impedance: 50 Ω

Power: max. 200W

#### Mechanical:

Length: Abt. 93cm

Weight: 490g

Cable: 4m RG58, 5mm

Cable end: FME


Add: Adaptor FME / UHF-PL259 m

#### Mounting:

Mount from inside: 13,5mm hole

Mounting from outer side: 19mm hole

Spanner tool: 25mm. 5Nm.

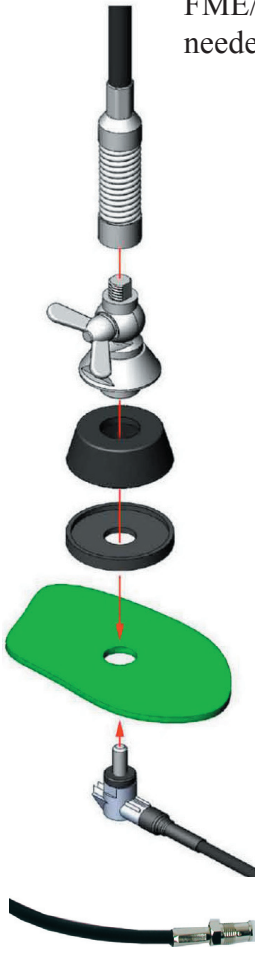

Stock No.  
34151

